

# St. steel AISI 316 case 6" Chart Recorder

- for pressure De Wit model 4892SS
- for temperature De Wit model 1892SS



St. steel AISI 316 case 6" Chart Recorder De Wit model 4892SS, panel mount

## Specifications

- Rectangular recorder for wall or panel mounting
- Case material St. steel AISI 316, weather proof
- Recording with disposable felt pen on circular recorder charts diameter 163 mm, writing width 60 mm
- Mechanical spring wound clock, revolution time 24 hrs (clockwise)
- Window laminated safety glass
- Accuracy Class 1,0
- Connection bottom or back, 1/2" NPT or 1/2" BSP

Minimum pressure range:

0-1 bar / 0-15 psi

Maximum pressure range:

0-4000 bar / 0-60.000 psi


Minimum temperature: -170 °C.

Maximum temperature: +600 °C

Minimum temperature span: 60 °C

## Options

- Portable execution (with handle & feet, add T to type number)
- Wetted parts stainless steel AISI 316 (for range 0-1600 bar max.)
- Mechanical spring wound clock, revolution time 1 hr, 4 hrs, 8 hrs, 12 hrs or 7 days (clockwise, optional: anti-clockwise)
- Mechanical switchable clockworks 1 hr/15 min, 1 hr/4 hrs, 24 hrs/7 days
- Multiprogrammable battery-operated chart drive (anti-clockwise)
- Other ranges and connections available upon request
- Special executions on request
- Dual ranges

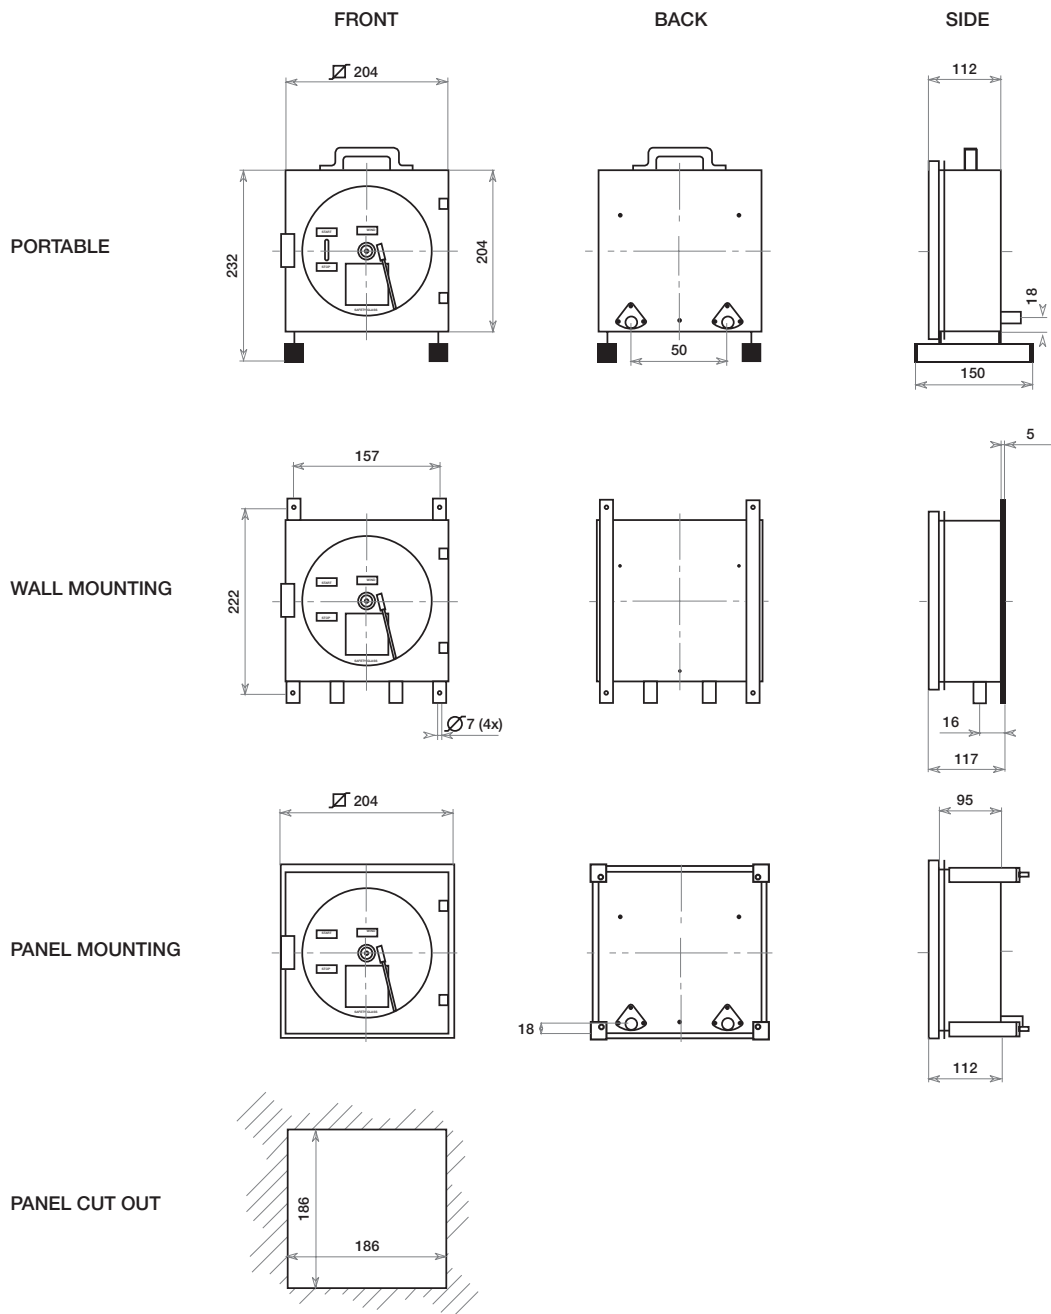

**Ordering information:**

- Model number
- Mounting: wall mount/panel mount/portable
- Range
- Clockwork revolution time
- For temperature recorders: capillary length, connection and bulb specifications
- Options, if any

Note: All our recorders are supplied with 50 recorder charts and 1 spare feltpen. If you require a calibration certificate (traceable to (inter)national standards), please specify in case of order.